

Duke Energy Light Poles

10. A 72088

7. A 72081

8. A 72079

9. A 72080



10. B. 13509

166085

A72078

B13508

A72076

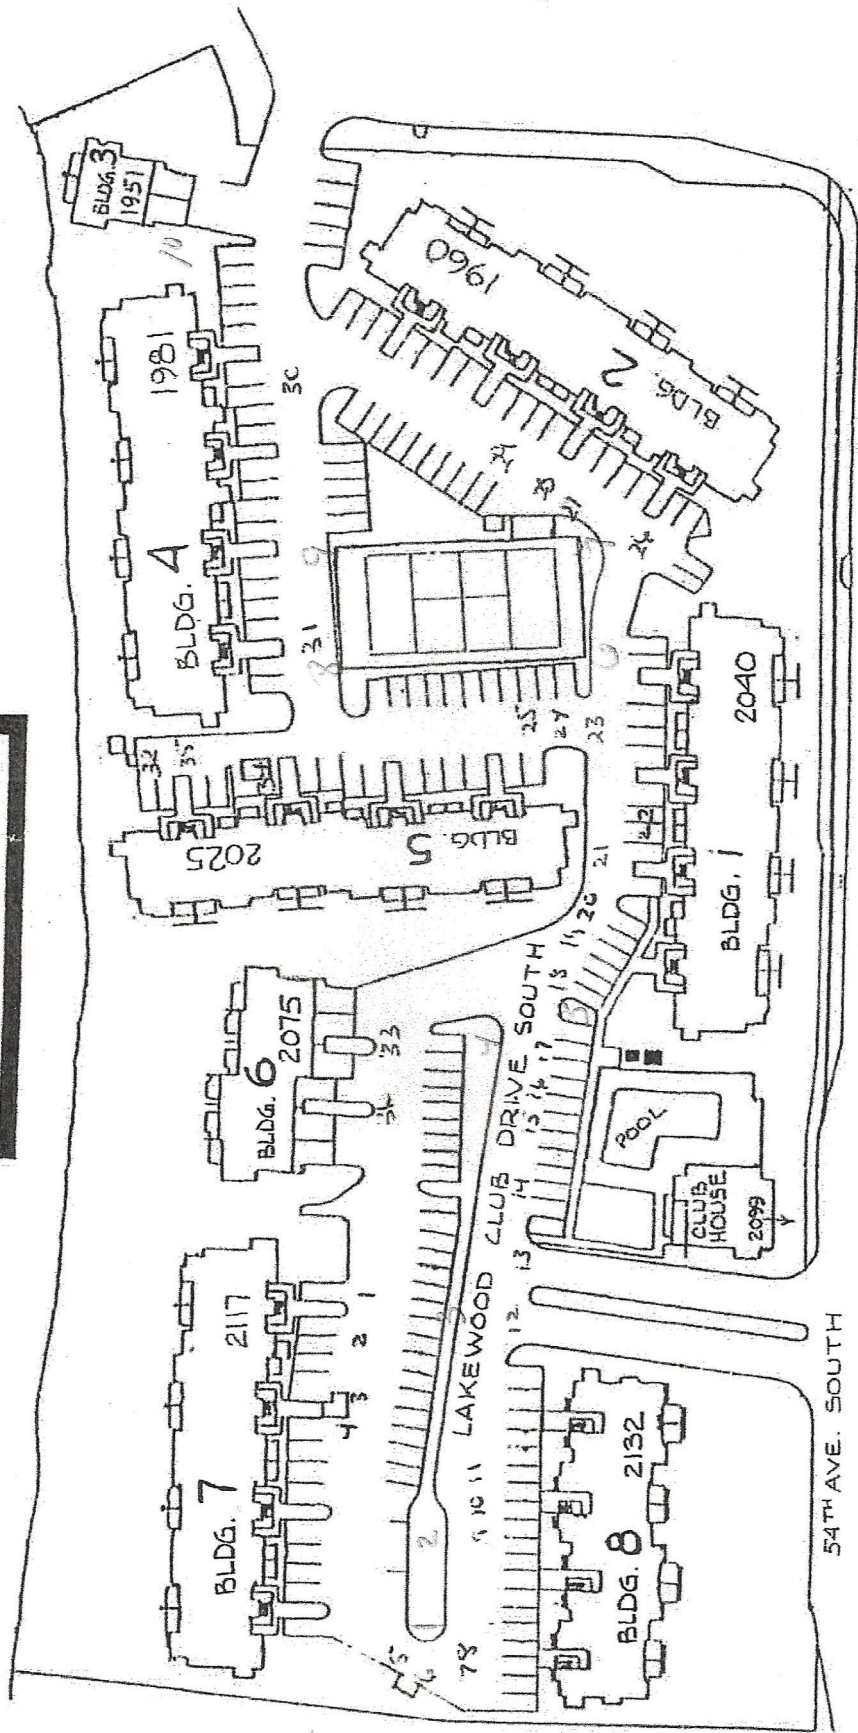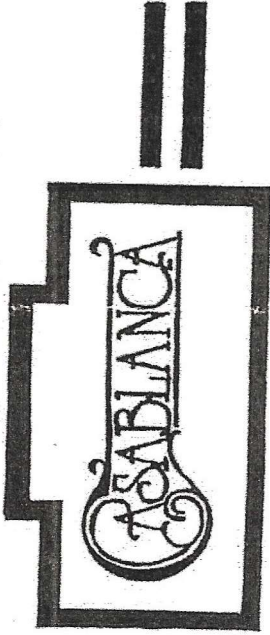

## DUMPSTER #'S

CALL CITY FOR LARGE PICK UP

893-7398 Before 10 am for next day

DUMPSTER 1 (POOL) 40021

DUMPSTER 2 (STORAGE B) 30075

DUMPSTER 3 (BACK GATE) 30305

DUMPSTER 4 (2025) 30090

DUMPSTER 5 (WEST END) 30104



## CASABLANCA SHUT OF VALVES

MANHOLE NORTH : BUILDINGS 1960,1951,1981,2025

MANHOLE SOUTH : BUILDINGS 2040 and CLUBHOUSE

MANHOLE WEST : BUILDINGS 2075, 2117 and 2132

Golf Cart

Vendor Golfcar.com

727 - 536 - 0416

### Customer Maintenance Guidelines

#### TIRES:

Tire inflation should be checked on a daily basis. Recommended pressure for the standard 8.50 x 8 tire is 22lbs. Check pressure when the tires are cool.

On hard surfaces, it is desirable to have a slightly higher inflation pressure to prevent excessive traction. On soft fairways, lower tire pressure prevents tires from cutting into fairways by affording more flotation. All tires should have the same pressure.

\*(Recommend 25lbs psi from maintenance carts)

#### LINKAGE:

All accelerator and brake linkages should be sprayed periodically with a lubricant such as WD-40, CRC, etc. Also, cart should be greased in front end zerk fittings every six months or more often with heavy usage.

#### BATTERIES:

Water/electrolyte level should be checked at least once per week. If water level is low, add water to BRING LEVEL BACK UP TO JUST BELOW THE BOTTOM OF THE FILL OPENING... DO NOT OVERFILL, as this will cause loss of acid and result in battery failure and body corrosion.

Do not add water until AFTER batteries are fully charged UNLESS...THE WATER LEVEL IS BELOW TOP OF SEPARATORS. If so, add only enough water to cover separators, recharge batteries... THEN REFILL TO PROPER WATER LEVEL.

\*NOTE: It is wise to recharge a battery that is not in use every one to two months.

#### CLEANING:

Battery caps have ventilation holes that allow batteries to breath, which can result in acid build-up on top of batteries. To prevent any damage which may result, batteries and entire battery compartment should be washed using a garden hose with a pressure nozzle at least once a month to remove any dirt or acid that may have built up in battery area.

#### WARNING:

Lead acid batteries continuously emit HIGHLY EXPLOSIVE gases. Flames and sparks must be kept away from batteries at all times. *This emission is greatly increased during the charging process.* When charging batteries, the area must be well ventilated.